

IP66 Waterproof Jetson Orin™ NX/ Nano AI Computer with 6x GMSL2 or 4x PoE+ GbE Ports



- Powered by NVIDIA® Orin™ NX or Orin™ Nano SoM bundled with JetPack
- IP66 waterproof and dustproof
- -25°C to 70°C fanless operation (No throttling at 70°C with 20W TDP Mode)
- 6x GMSL2 automotive cameras via FAKRA Z connectors (NRU-161V-AWP)
- 4x PoE+ GbE via M12 X-coded connectors (NRU-162S-AWP)
- 1x CAN FD and 1x RS232 via M12 A-coded connectors
- 225 x 136 x 55 mm low-profile design
- 8V to 35V wide-range DC input with built-in ignition power control


GET QUOTE

The integration of IP66 waterproof capability, Orin NX AI performance, and rich onboard camera connectivity strikes a balance between ruggedness, performance, and cost. It is a ready-to-deploy waterproof edge AI platform for smart agriculture, mining, construction, roadside applications, edge inspection, and outdoor AMRs.


Specifications

[1]The required DC input range is 8V to 35V when the system load is under 60W. The required DC input range is 12V to 35V when the system load is between 60W to 96W. The required DC input range is 20V to 35V when the system load is between 96W to 160W.
[2]For sub-zero and over 60°C operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required

Appearance

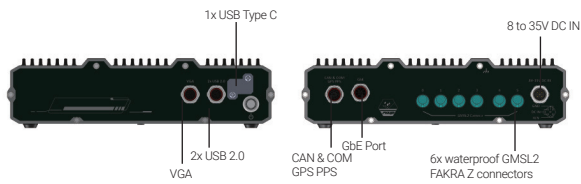



NRU-161V-AWP

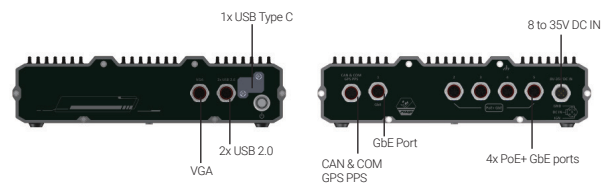



NRU-162S-AWP

Dimensions

Unit : mm

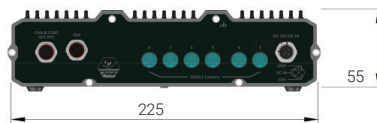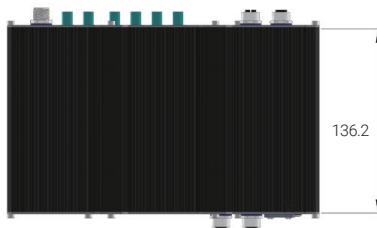

NRU-161V-AWP

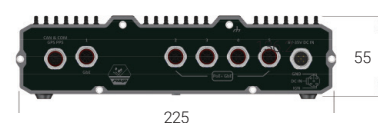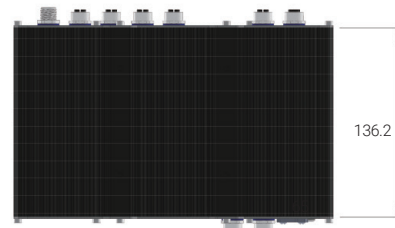

NRU-162S-AWP




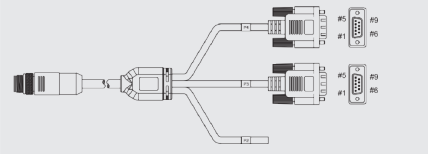

Ordering Information

Model No.	Product Description
NRU-161V-AWP	IP66 Waterproof Jetson Orin™ NX/ Nano Edge AI Computer with 6x GMSL2 Ports
NRU-162S-AWP	IP66 Waterproof Jetson Orin™ NX/ Nano Edge AI Computer with 4x PoE+ GbE Ports
Jetson Module Option	Options for Different Jetson Orin™ NX and Jetson Orin™ Nano SKUs
NVMe Option	Options for Different Capacities of M.2 2242 NVMe Storage

Optional Accessories

PA-60W-OW	60W AC/ DC power adapter 12V/ 5A; cord end terminals for terminal block, operating temperature: -30 to 60°C
PA-160W-OW	160W AC/ DC power adapter 20V/ 8A; 18AWG/ 120cm; cord end terminals for terminal block, operating temperature: -30 to 70°C
AC-ISX031-H60	Sony ISX031 CMOS sensor w/ built-in ISP; 1920x1536 @30fps, HFOV H63.9°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
AC-ISX031-H120	Sony ISX031 CMOS sensor w/ built-in ISP; 1920x1536 @30fps, HFOV H120.6°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
AC-ISX031-H190	Sony ISX031 CMOS sensor w/ built-in ISP; 1920x1536 @30fps, HFOV H195.9°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
AC-IMX390-H60	Sony IMX390 CMOS sensor camera; 1920x1080 @ 30fps; LFM; HFOV 63.9°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
AC-IMX390-H120	Sony IMX390 CMOS sensor camera; 1920x1080 @ 30fps; LFM; HFOV 120.6°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
AC-IMX390-H190	Sony IMX390 CMOS sensor camera; 1920x1080 @ 30fps; LFM; HFOV 186°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
AC-IMX490-H30	Sony IMX490 CMOS sensor camera; 2880x1860 @30fps; LFM; HFOV 30.0°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
AC-IMX490-H60	Sony IMX490 CMOS sensor camera; 2880x1860 @30fps; LFM; HFOV 62.5°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
AC-IMX490-H120	Sony IMX490 CMOS sensor camera; 2880x1860 @30fps; LFM; HFOV 120°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap

NRU-160-AWP Series

Type	Model Name	Description
	Cbl-FAKRA-ZFM-ZFM-12M	Waterproof FAKRA Z-code Female to Waterproof FAKRA Z-code Female, Length: 12M
	Cbl-M12X8M-RJ45F-100CM	Waterproof M12 (8-pole-X-coded) to RJ45 Female, CAT6A, Length: 100CM
	Cbl-M12A8M-2U2TA-180CM1	Waterproof M12 (8-pole-A-coded) to 2x USB 2.0 type A (female), Length: 180CM
	Cbl-M12A8M-2DB9M_OW2-180CM1	M12 A-Code Male 8P to x2 DB9 Male+2P, Length: 180CM
	Cbl-M12A17M-VGA-180CM2	M12 (17-pole-A-coded-S) to VGA (male), Length : 180CM

Cable Kit

NRU-160-AWP Series cable kit		
Cblkit-NRU-161V-AWP	6xCbl-FAKRA-ZFM-ZFM-12M	1xCbl-M12X8M-RJ45F-100CM
	1xCbl-M12A8M-2U2TA-180CM1	1xCbl-M12A8M-2DB9M_OW2-180CM1
	1xCbl-M12A17M-VGA-180CM2	
Cblkit-NRU-162S-AWP	5xCbl-M12X8M-RJ45F-100CM	1xCbl-M12A8M-2U2TA-180CM1
	1xCbl-M12A8M-2DB9M_OW2-180CM1	1xCbl-M12A17M-VGA-180CM2